



Technical data sheet

Programing Cable PMC

Part No.: 203PMC04001001

BASIC FEATURES:

for connection between PC and LPC2_MCx

MATERIALS:

Cable:

- Color: Gray
- Flame Rating: CM
- UL, ETL Verified, TIA/EIA 568B.2-1
- ISO/IEC 11801, EN 50173
- Transmission quality verified up to 250MHz
- Impedance: 100 ± 15 ohms
- DC Resistance, max. Ohms/ 100m: 9.38


Conectors:

- RJ12: polycarbonat, UL94V-2, transparent
- DB9 FM with case

MECHANICAL:

- bending radius min 43mm
- tractive force max 30N
- nominal temperature range of use from -20°C to +50°C

DIMENSIONS:

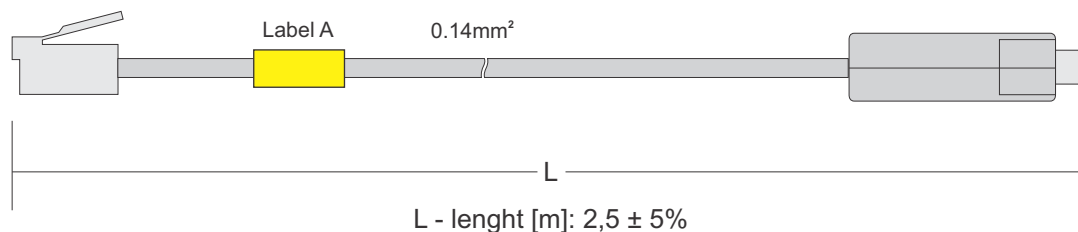

CONNECTION DIAGRAM:

