



SMARTEH[®]
LIVING SYSTEMS

USER MANUAL

- ▶ Longo programmable controller
LPC-2.D01
Transistor Output module

Version 5

Written by SMARTEH d.o.o.
Copyright © 2012, SMARTEH d.o.o.

User Manual

Document Version: 005
July 1, 2012



STANDARDS AND PROVISIONS: Standards, recommendations, regulations and provisions of the country in which the devices will operate, must be considered while planning and setting up electrical devices. Work on 100 .. 240 V AC network is allowed for authorized personnel only.

DANGER WARNINGS: Devices or modules must be protected from moisture, dirt and damage during transport, storing and operation.

WARRANTY CONDITIONS: For all modules LONGO LPC-2 - if no modifications are performed upon and are correctly connected by authorized personnel - in consideration of maximum allowed connecting power, warranty of 24 months is valid from the date of sale to the end buyer, but not more than 36 months after delivery from Smarteh. In case of claims within warranty time, which are based on material malfunctions the producer offers free replacement. The method of return of malfunctioned module, together with description, can be arranged with our authorized representative. Warranty does not include damage due to transport or because of unconsidered corresponding regulations of the country, where the module is installed.

This device must be connected properly by the provided connection scheme in this manual. Misconnections may result in device damage, fire or personal injury.

Hazardous voltage in the device can cause electric shock and may result in personal injury or death.

NEVER SERVICE THIS PRODUCT YOURSELF!

This device must not be installed in the systems critical for life (e.g. medical devices, aircrafts, etc.).

If the device is used in a manner not specified by the manufacturer, the degree of protection provided by the equipment may be impaired.

Waste electrical and electronic equipment (WEEE) must be collected separately!

LONGO LPC-2 complies to the following standards:

- EMC: EN 61000-6-3:2007 + A1:2011, EN 61000-6-1:2007, EN 61000-3-2:2006 + A1:2009 + A2: 2009, EN 61000-3-3:2013
- LVD: IEC 61010-1:2010 (3rd Ed.), IEC 61010-2-201:2013 (1st Ed.)

Smarteh d.o.o. operates a policy of continuous development. Therefore we reserve the right to make changes and improvements to any of the products described in this manual without any prior notice.

MANUFACTURER:

SMARTEH d.o.o.
Poljubinj 114
5220 Tolmin
Slovenia



Index

Longo programmable controller LPC-2.D01

1 DESCRIPTION.....	1
2 FEATURES.....	2
3 INSTALLATION.....	3
3.1 Connection scheme.....	3
3.2 Mounting instructions.....	5
3.3 Module labeling.....	6
4 TECHNICAL SPECIFICATIONS.....	7
5 CHANGES	8
6 NOTES.....	9



1 DESCRIPTION

LPC-2.DO1 is used as standard digital output module. Module has current protected and galvanic isolated output. It can be used in a wide range of operation.

LED indicates active signal present on module output (refer to the Table 5).

Module is powered from internal BUS.

NOTE: For proper system configuration and data allocation please refer to LPC Composer software help menu.



2 FEATURES

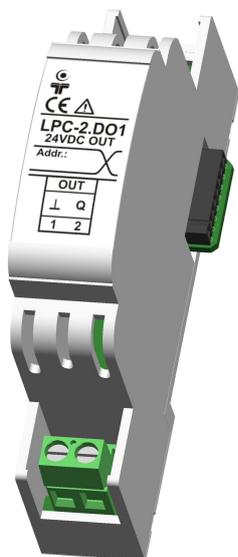


Figure 1: LPC-2.DO1 module.

Table 1: Technical data

Standard digital output, current limited, galvanic isolated

Flexible output for wide use of operation

Small dimensions and standard DIN EN50022-35 rail mounting



3 INSTALLATION

3.1 Connection scheme

Figure 2: Connection scheme

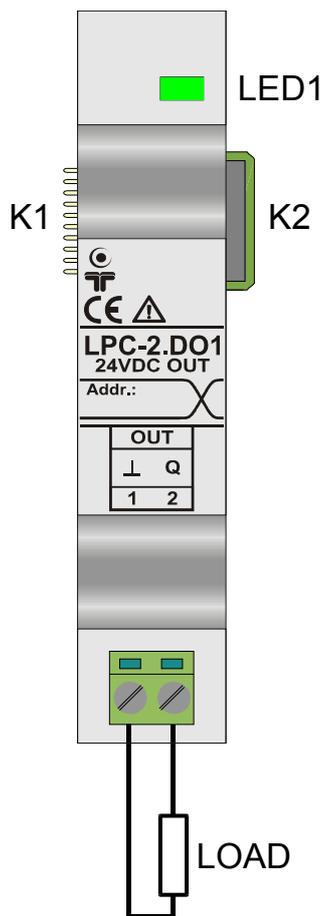


Table 2: OUT¹

OUT.1	Reference	Reference to 24 V DC
OUT.2	Digital output in reference to OUT.1, 0 .. 24 V DC Max. output current = 100 mA Max. output frequency = 10 Hz	24 V DC digital output

¹ Wires connected to the module must have cross sectional area at least 0.75 mm². Minimum temperature rating of wire insulation must be 85 °C.





Table 3: K1

Internal BUS	Data & DC power supply	Connection to I/O module
--------------	------------------------	--------------------------

Table 4: K2

Internal BUS	Data & DC power supply	Connection to I/O module
--------------	------------------------	--------------------------


Table 5: LED1

Status	Digital output state	On: voltage on output pin Off: no voltage on output pin
--------	----------------------	--



3.2 Mounting instructions

Figure 3: Housing dimensions

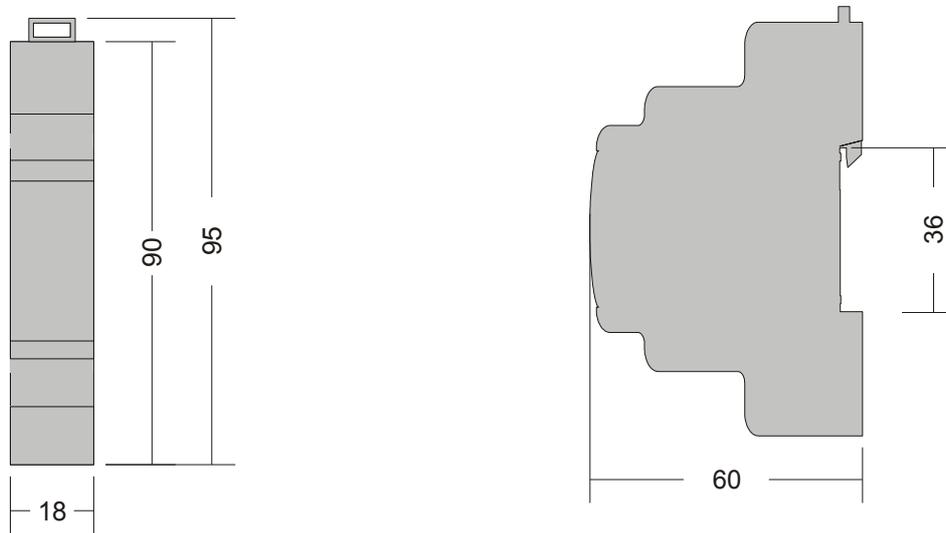

Dimensions in millimeters.



All connections, module attachments and assembling must be done while module is not connected to the main power supply.

Mounting instructions:

1. Switch OFF main power supply.
2. Mount LPC-2.DO1 module to the provided place inside an electrical panel (DIN EN50022-35 rail mounting).
3. Mount other LPC-2 modules (if required). Mount each module to the DIN rail first, then attach modules together through K1 and K2 connectors.
4. Connect digital output wires according to the connection scheme in Figure 2.
5. Switch ON main power supply.


Dismount in reverse order. For mounting/dismounting modules to/from DIN rail a free space of at least one module must be left on the DIN rail.




3.3 Module labeling

Figure 4: Labels on housing

Label 1 (MC3 sample):

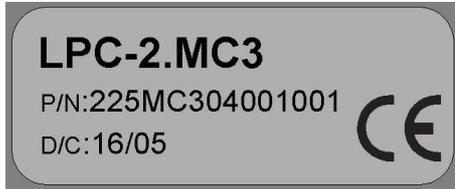

Label 2 (MC3 sample):

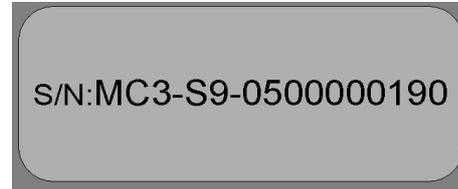

Label 1 description:

1. **LPC-2.MC3** is the full product name.
2. **P/N:225MC304001001** is the part number.
 - **225** - general code for product family,
 - **MC3** - short product name,
 - **04001** - sequence code,
 - **04** - year of code opening,
 - **001** - derivation code,
 - **001** - version code (reserved for future HW and/or SW firmware upgrades).
3. **D/C:16/05** is the date code.
 - **16** - week and
 - **05** - year of production.

Label 2 description:

1. **S/N:MC3-S9-0500000190** is the serial number.
 - **MC3** - short product name,
 - **S9** - user code (test procedure, e.g. Smarteh person xxx),
 - **0500000190** - year and current stack code,
 - **05** - year (last two cyphers),
 - **00000190** - current stack number; previous module would have the stack number **00000189** and the next one **00000191**.



4 TECHNICAL SPECIFICATIONS

Table 6: Technical specifications

Power supply	from internal BUS
Power consumption	0.75 W
Rated output voltage	24 V DC, $\pm 35\%$
Max. output current	100 mA, short circuit proof
Number of digital outputs	1
Connection type	screw type connector for stranded wire 0.75 to 2.5 mm ²
Dimensions (L x W x H)	90 x 18 x 60 mm
Weight	50 g
Ambient temperature	0 to 50 °C
Ambient humidity	max. 95 %, no condensation
Transport and storage temperature	-20 to 60 °C
Pollution degree	2
Protection class	IP 30





5 CHANGES

The following table describes all the changes to the document.

Date	V.	Description
1.7.2012	005	CGP General update.
11.5.2010	004	Updated warranty permanence.
31.3.2006	003	- Added output isolation description - Added output protection type description - Pollution degree changed to 2
30.6.2005	002	The initial version, issues as <i>LPC-2.DO1 module UserManual</i> .





6 NOTES

