



## Technical data sheet

### Interconnection cable STK4-x

#### FUNCTIONS:

-for connection RJ12 => screw

#### MATERIALS:

Cable:

-PVC

-26 AWG (7 x 0,16) 0,14 mm<sup>2</sup>, flat

#### CONNECTORS:

-RJ12: polycarbonat, UL94V-2, transparent

-ferrules



-screw terminal block

#### MECHANICAL:

-bending radius min 32 mm

-tractive force 30 N

-nominal temperature range of use  
from -20°C to +90°C

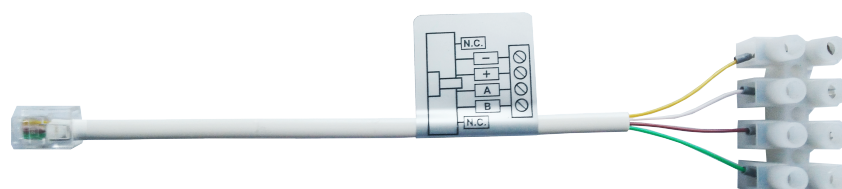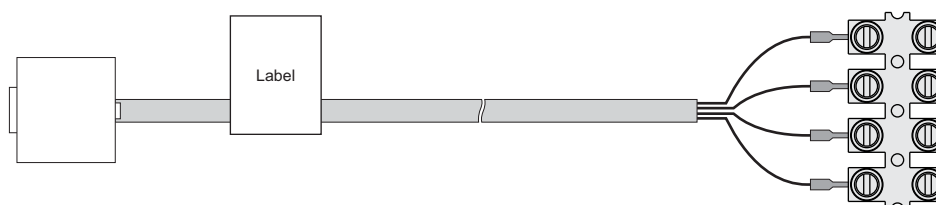

Symbolic picture